

SIZE	INLET	AIR RELEASE DRAWING	A	B	C	D	ASSEMBLY WEIGHT
2"	2" NPT	EAR-7008	26"	30"	5 $\frac{5}{8}$ "	3 $\frac{3}{4}$ "	75 lbs.
3"	3" NPT		27"	31"	4 $\frac{5}{8}$ "	4 $\frac{1}{4}$ "	90 lbs.

CONNECT HOSE
HERE TO CLEAN
ORIFICE

FLUSH VALVE
1/2" BALL VALVE

5 FT. RUBBER HOSE WITH 1/2"
QUICK CONNECTS


2" NPT
CLEANOUT
PORT
(PLUGGED)

CONNECT HOSE HERE
TO CLEAN LINKAGE
MECHANISM

ALTERNATE FLUSH
CONNECTION

BLOW OFF VALVE
1" BALL VALVE

2" OR 3"
ISOLATION BALL
VALVE

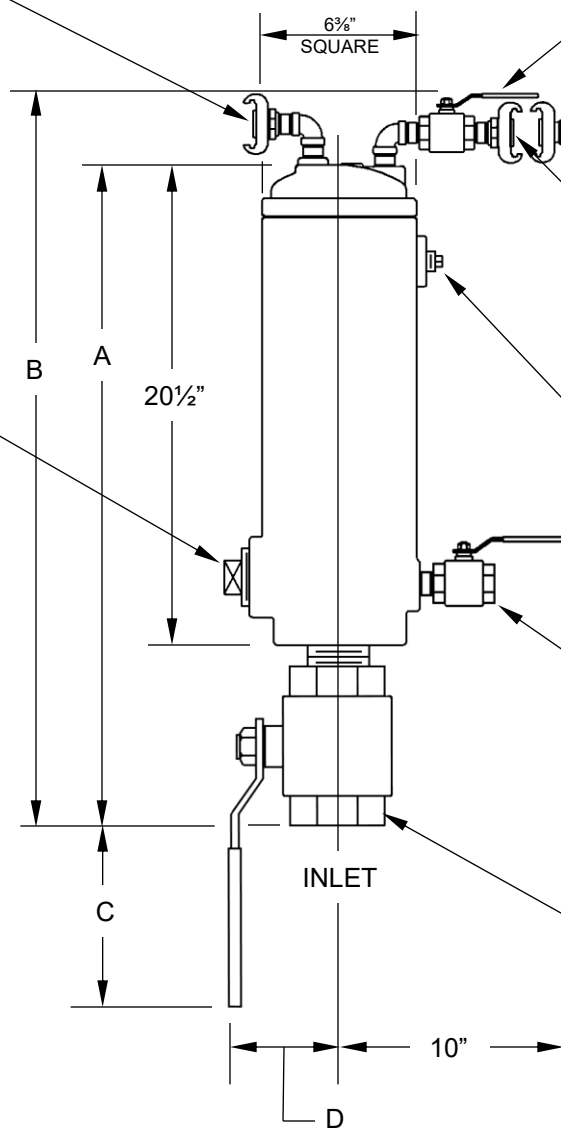

Notes:

1. Refer to drawing EAR-7008W (Figure 925) or EAR-7008SW (Figure 925SS) for air release valve details
2. Dimensions in inches, weight in pounds, and are approximate.

GA INDUSTRIES <small>a +GF+ Brand</small>		
DATE:	2/27/09	DRAWN BY: WJN
WASTEWATER AIR RELEASE VALVE WITH FLUSHING ATTACHMENTS		
FIGURE 925F OR 925SSF	DRAWING NO. EAR-7008F-W	REV B