


SIZE	A	B	C	D	E	F	Wgt
2"	5¼	6	4¾	5/8	3/4	1-3/8	13
2½"	5½	7	5½	11/16	3/4	1	18
3"	6	7½	6	3/4	3/4	1-3/8	23
4"	7¼	9	7½	15/16	3/4	1-9/16	40
6"	9¾	11	9½	1	7/8	2-7/16	75

Dimensions in inches, weights in pounds and are approximate. If critical request certified drawing.

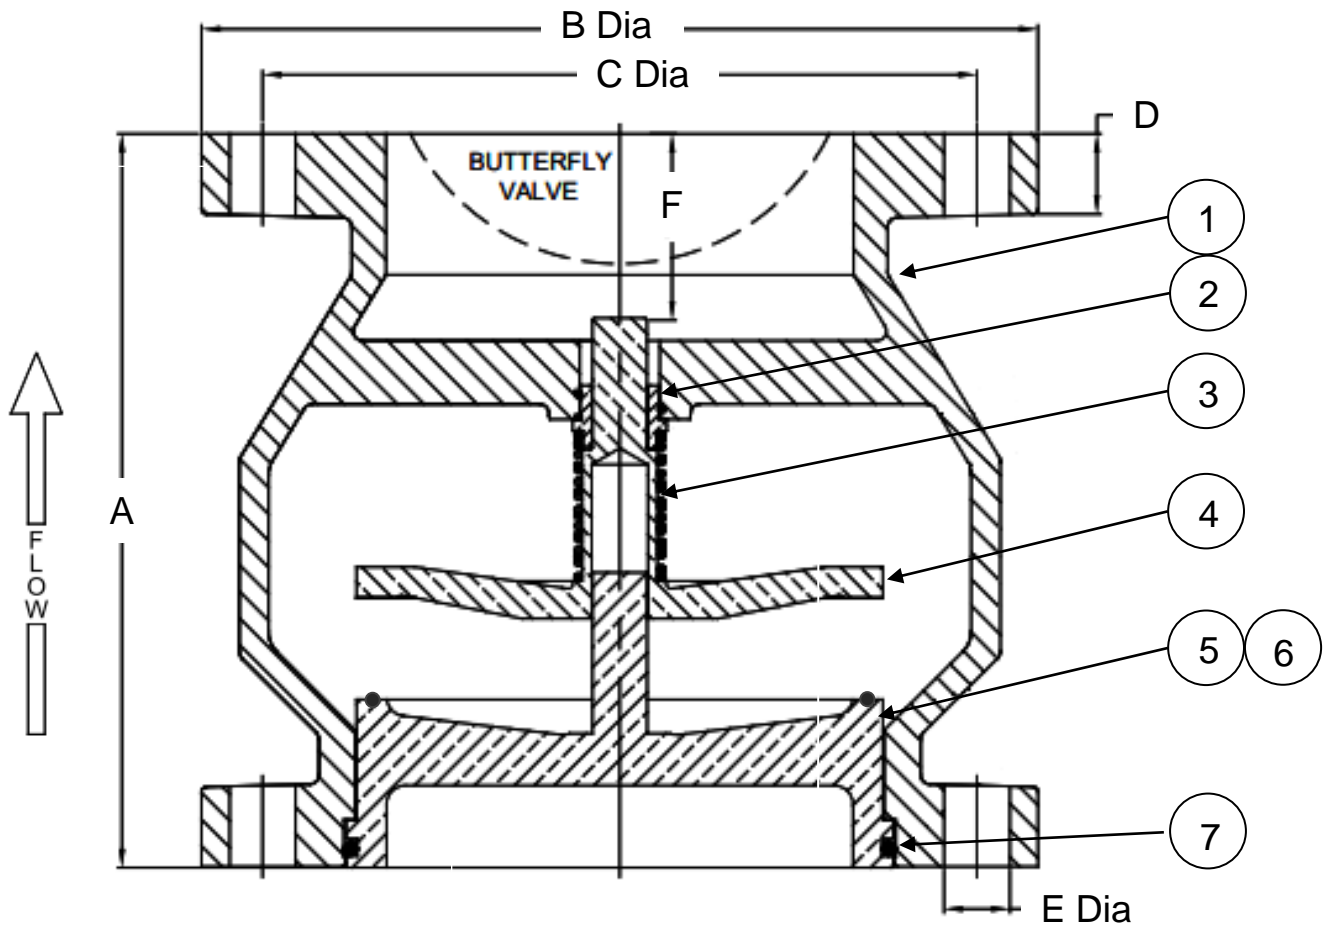

Item	Description	Material	Specification
1	Body	Ductile Iron*	ASTM A535 65-45-12
2	Bushing	Lead Free Bronze	C95400
3	Spring	Stainless Steel	Type 302
4	Poppet	Lead Free Bronze	C87600 or C87800
5	Seat Ring	Lead Free Bronze	C87600 or C87800
6**	O-Ring	Rubber	EPDM
7	O-ring	Rubber	EPDM

* Fusion bond epoxy lined and coated

** Item 6 not used in metal-to-metal seated valves

Maximum Pressure 300 PSI at 150F
Maximum Temperature 200F
Flanges per ANSI B16.42 Class 150
Flange drilling mates with ANSI B16.1 Class 125

GA INDUSTRIES, a VAG Brand		
DATE:	10-3-21	DRAWN BY: WJN
2" to 6" Figure F280 Globe Silent Check Valves		
DRAWING NO.		REV
C-7023-1F		