


SIZE	A	B	C	D	E	F	Wgt
8"	12-9/16	13-1/2	11-3/4	1-1/8	7/8	3-1/4	116
10"	15-1/2	16	14-1/4	1-3/16	1	4-1/4	194

Dimensions in inches, weights in pounds and are approximate. If critical request certified drawing

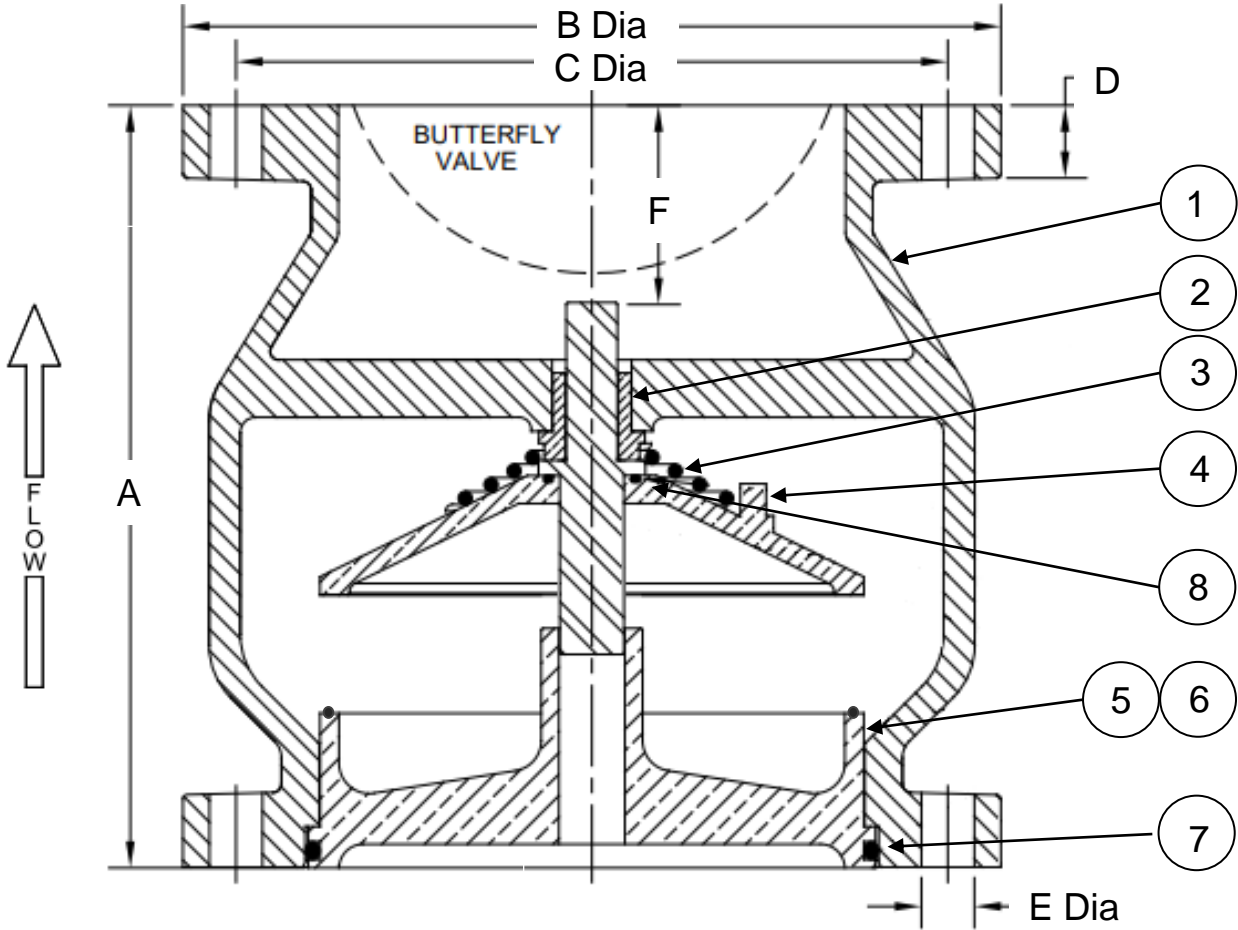

Item	Description	Material	Specification
1	Body	Ductile Iron*	ASTM A535 65-45-12
2	Bushing	Lead Free Bronze	C95400
3	Spring	Stainless Steel	Type 302
4	Poppet	Lead Free Bronze	C87600 or C87800
5	Seat Ring	Lead Free Bronze	C87600 or C87800
6**	O-Ring	Rubber	EPDM
7	O-Ring	Rubber	EPDM
8	O-Ring	Rubber	EPDM

\* Fusion bond epoxy lined and coated  
 \*\* Item 6 not used in metal-to-metal seated valves

Maximum Pressure 300 PSI at 150F  
 Maximum Temperature 200F  
 Flanges per ANSI B16.42 Class 150  
 Flange drilling mates with ANSI B16.1 Class 125

<b>GA INDUSTRIES, a VAG Brand</b>		
DATE:	10-3-21	DRAWN BY: WJN
<b>8" &amp; 10" Figure F280 Globe Silent Check Valves</b>		
DRAWING NO.		REV
C-7023-2F		