

Figure B517 100% Full Port Flow Round Port Eccentric Plug Valves For In Plant or Exposed Service

Description

The GA Industries Figure B517 Eccentric Plug Valve is a rugged, field-proven valve that will provide many decades of trouble-free service. Its flow efficient round port provides lower head loss, 100% full flow and better solids handling ability than traditional plug valves. In addition, the epoxy coated ductile iron body and cover provide superior strength and long-term corrosion resistance while the spherically seating rubber coated plug provides drop tight shutoff in both directions.

Figure B517 exposed service eccentric plug valves are available with a 2" direct operating nut for quarter turn wrench operation (optional chain lever) or a worm gear with handwheel (optional chainwheel or 2" operating nut).

Standard Features

- Internal and external epoxy coated, high strength ductile iron body and cover
- Flow efficient round port, out-performs rectangular port plug valves
- Bi-directional zero leakage seating up to full rated pressure
- Shaft packing adjustable and replaceable without removing the actuator
- Upper and lower grit excluders for extended bearing life
- Type 316 stainless steel external fasteners, including packing studs and nuts

Standard Materials

- Body and Cover Ductile Iron, ASTM A536 Grade 65-45-12
- Body Seat Weld Overlaid 95% Pure Nickel
- Plug Coating Buna-N Rubber
- Shaft Bearings Stainless Steel, Type 316, Self Lubricating
- External Fasteners Type 316 Stainless Steel

Corrosion Protection

- Standard: Internal and External PPG/Amerlok 400 2-Part Epoxy, Minimum 6 mil DFT

Non-Shock Working Water Pressure at up to 180F (82C)			
Figure Number	B517		
Connections	ANSI Class 125 Flanged		
Operation	Direct Nut*	Worm Gear with Handwheel or 2" Nut	
Size	3" to 8"	3" to 12"	14" to 20"
Max Working Pressure	175 PSI		150 PSI
Hydro Test	265 PSI		225 PSI

* Quarter turn wrench/lever operated

Data Sheet 517.01E



Approvals & Certifications

- Fully complies with AWWA Standard C517

Options and Accessories


- Option VS Vacuum Service – Suitable for Pro-Cav Pump Suction or Vacuum Sewer Service
- Option CL With Chain Lever – Facilitates Operation of Overhead Direct Nut Valves
- Option CW With Chainwheel – Facilitates Operation of Overhead Worm Gear Operated Valves
- Option WS Worm Gear with 2" Operating Nut Instead of Handwheel

Ordering Data

- Figure Number B517
- Size
- Connection (Class 125 flanged)
- Operation (Direct Nut or Worm Gear)
- Options

Figure B517 100% Full Port Flow Round Port Eccentric Plug Valves For In Plant or Exposed Service

Data Sheet 517.01E

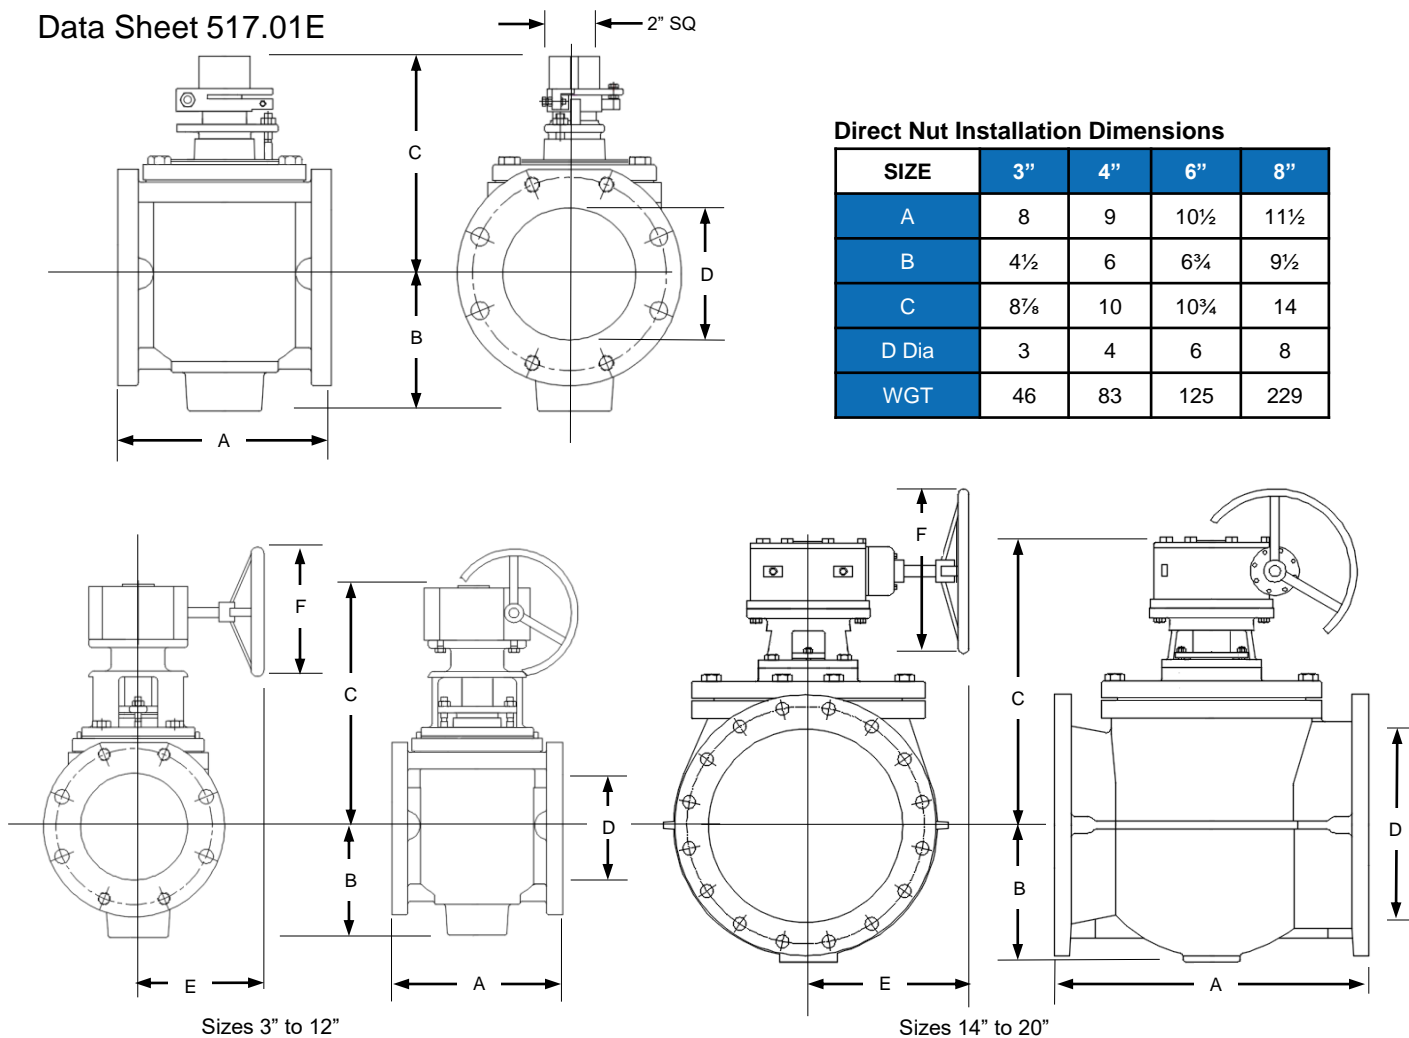

Worm Gear Installation Dimensions

SIZE	3"	4"	6"	8"	10"	12"	14"	16"	18"	20"
A	8	9	10½	11½	13	14	17	17¾	30	36
B	4½	6	6¾	9½	10½	11	11	13	13¾	15¾
C	10½	11¾	12½	16½	18½	19¾	22¾	24	24	26
D (Dia.)	3	4	6	8	10	12	14	16	18	20
E	9¼	9¼	9¼	10½	10½	10½	19¾	19¾	19¾	19¾
F (Dia.)	9	12	12	12	12	12	20	20	20	20
WGT	73	115	155	304	394	487	757	952	1254	2004

- Worm gear actuator can be rotated in 90-degree increments about valve centerline
- 2" square nut available instead of handwheel
- Dimensions in inches and weight in pounds and are approximate. Request certified drawings if critical.

Flow Coefficients

SIZE	3"	4"	6"	8"	10"	12"	14"	16"	18"	20"
C _v	569	982	1997	3371	4870	7643	8220	11300	12400	17500
K	0.24	0.24	0.30	0.32	0.38	0.31	0.39	0.35	0.47	0.36