


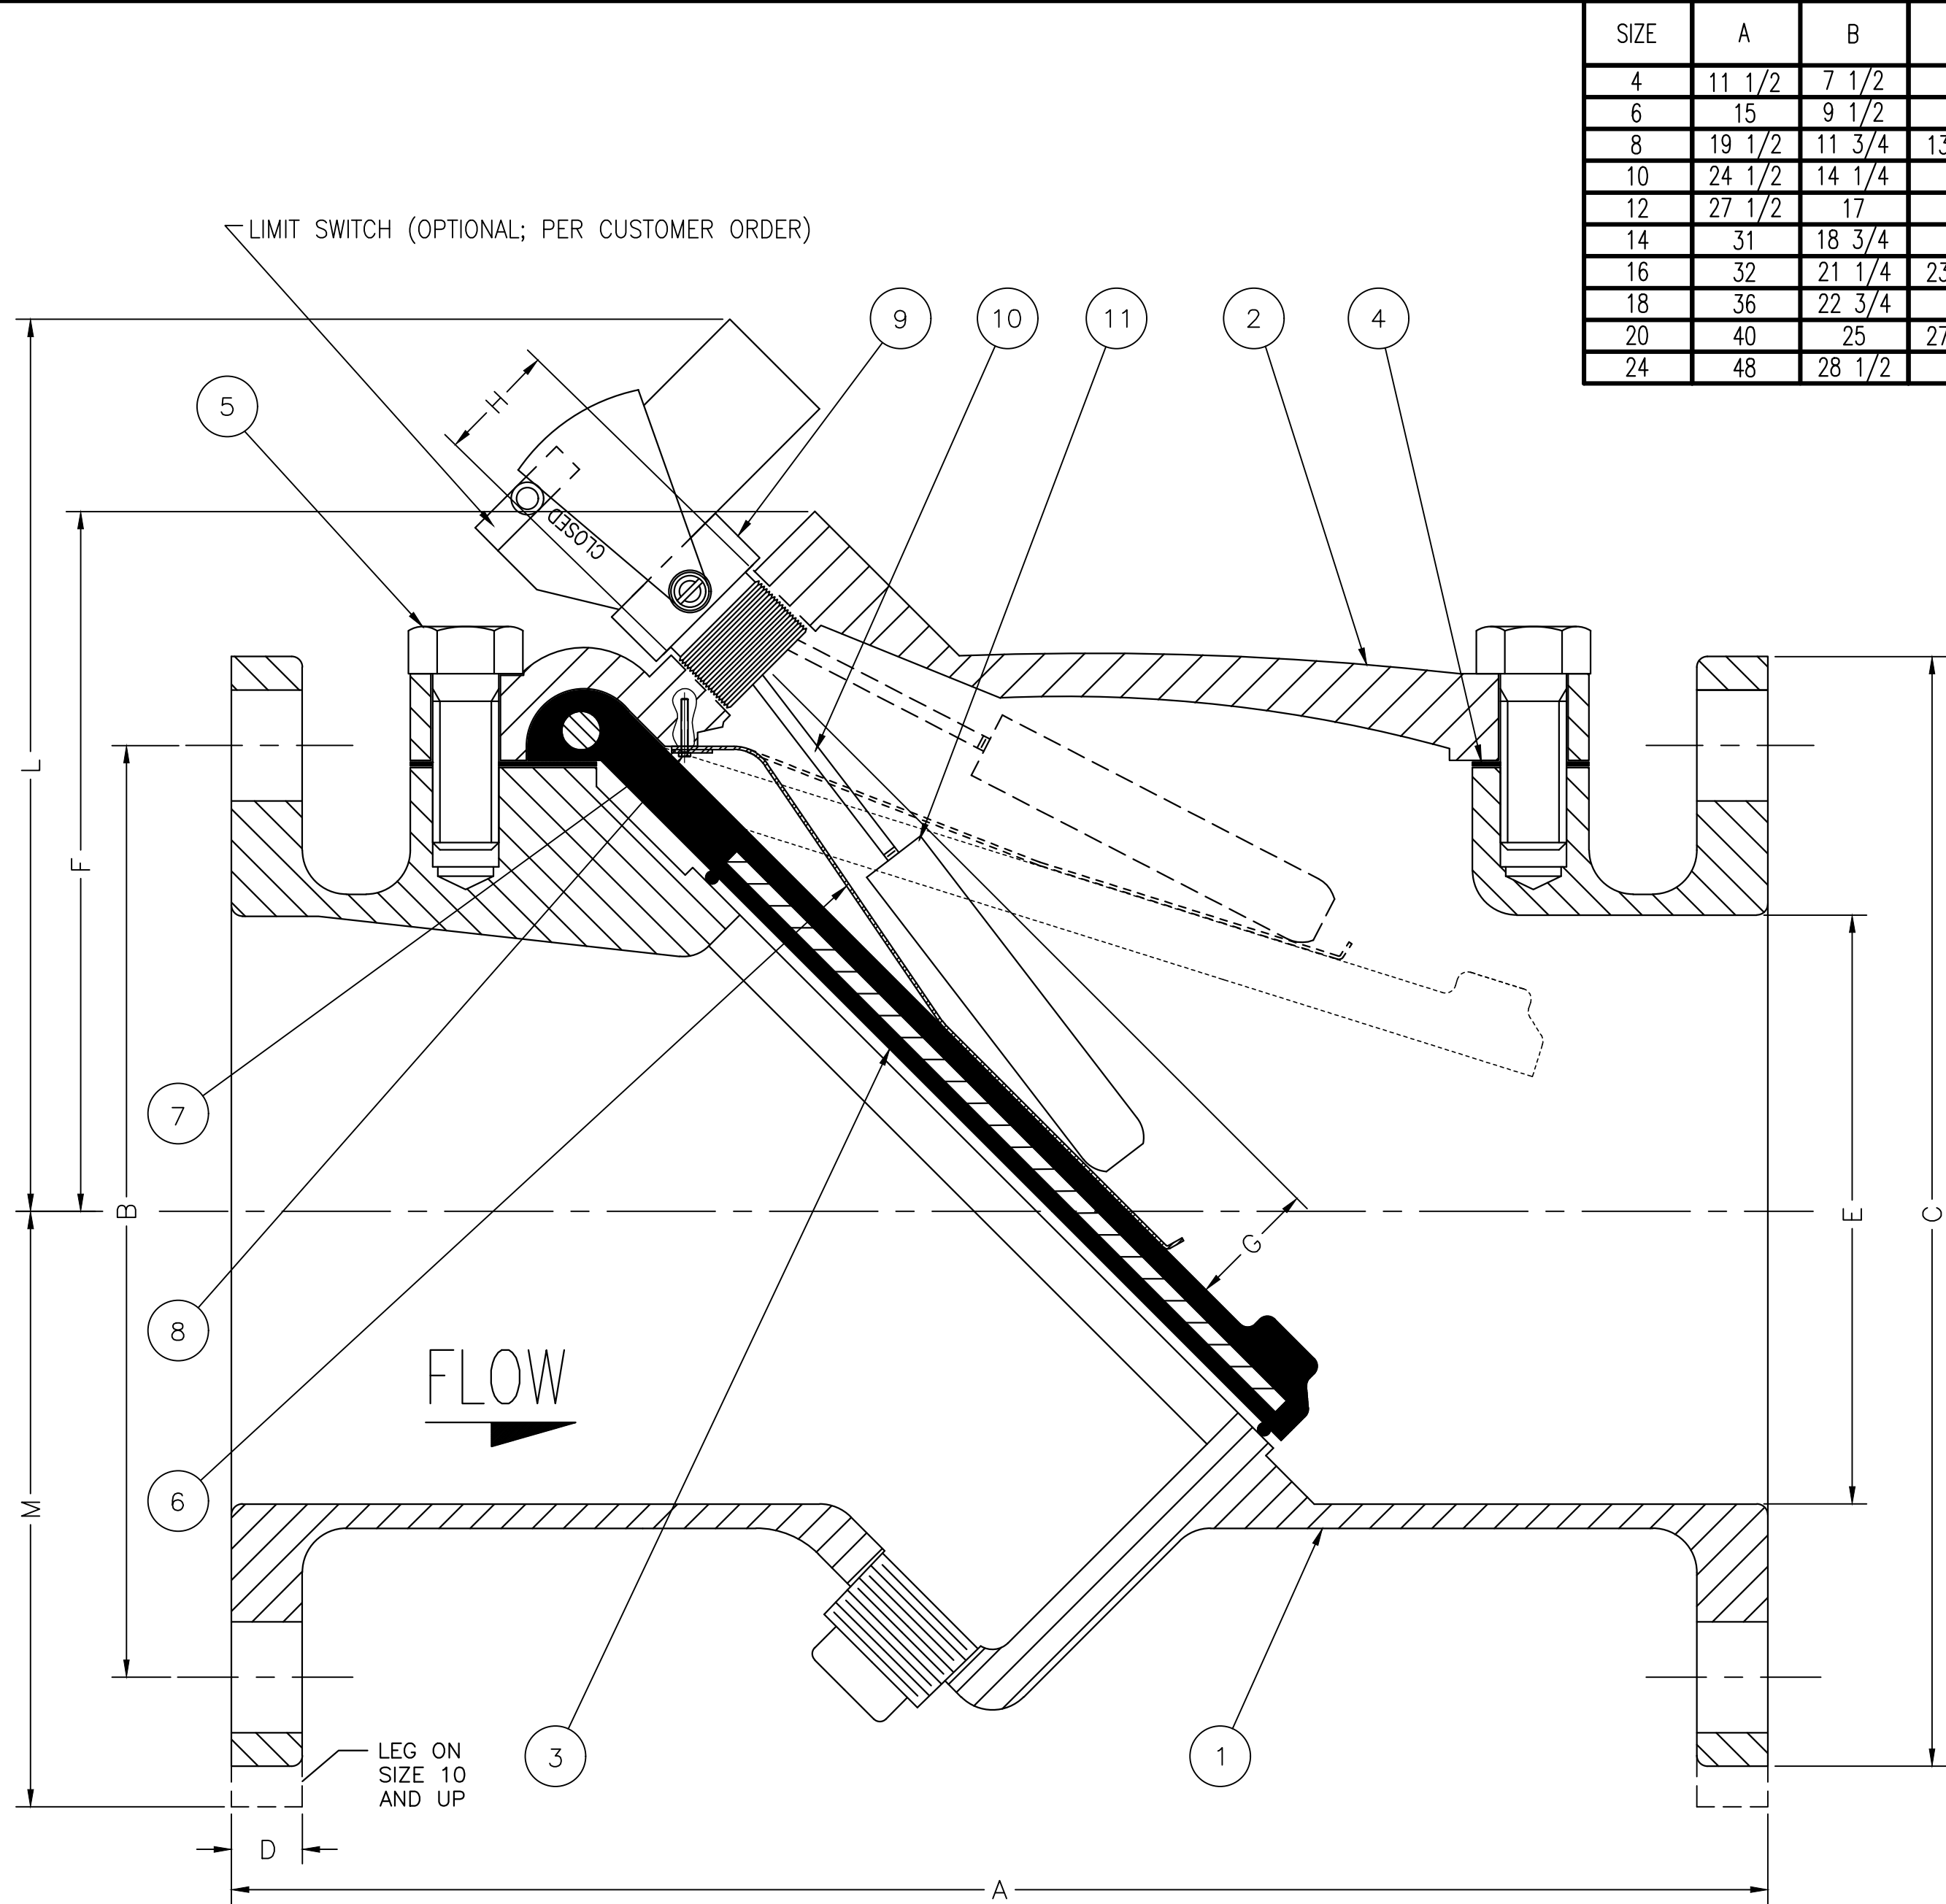

SIZE	A	B	C	D	E	F	BOLT SIZE	NO. OF BOLTS	G	H	L	M	LEG WIDTH CENTERED
4	11 1/2	7 1/2	9	15/16	4	5 3/4	5/8	8	1 1/2 ALL SIZES	1" ALL SIZES	8 3/4		
6	15	9 1/2	11	1	6	6 7/8	3/4	8			9 7/8		
8	19 1/2	11 3/4	13 1/2	1 1/8	8	8 3/8	3/4	8			11 3/8		
10	24 1/2	14 1/4	16	1 3/16	10	10 3/4	7/8	12			13 1/2	9 1/16	6
12	27 1/2	17	19	1 1/4	12	12 1/2	7/8	12			15 1/4	10 1/16	6 1/4
14	31	18 3/4	21	1 3/8	14	13	1	12			15 3/4	11 7/8	7 7/8
16	32	21 1/4	23 1/2	1 7/16	16	14 1/4	1	16			16 3/4	13	7 7/8
18	36	22 3/4	25	1 9/16	18	15 1/4	1 1/8	16	1 1/2 ALL SIZES	1" ALL SIZES	17 3/4	14 1/8	10 1/4
20	40	25	27 1/2	1 11/16	20	16 7/8	1 1/8	20			19 3/8	15	11
24	48	28 1/2	32	1 7/8	24	19 1/4	1 1/4	20			21 3/4	16 1/2	11 7/8

BILL OF MATERIALS			
No.	DESCRIPTION	QTY.	MATERIAL
1	BODY	1	DUCTILE IRON
2	COVER	1	DUCTILE IRON
3	DISC	1	RUBBER COATED STL
4	GASKET	1	NBR
5	COVER BOLTS	VARIABLE PER VALVE SIZE	SST
6	SPRING ASSIST	1	SST
7	SPRING ASSIST SUPPORT PLATE	1	SST
8	SPRING ASSIST SCREWS	2	SST
9	POSITION INDICATOR ASSEMBLY (INCLUDES L.S. IF REQ.'D)	1	SST & BRASS
10	COUNTERWEIGHT ARM	1	SST
11	COUNTERWEIGHT	1	SST

E	ADDED DIMENSION "M" AND LEG	02-25-2022	JCS
D	ADDED DIMENSION "L"	03-29-2018	SWR
C	NOTED LIMIT SWITCH AS OPTIONAL COMPONENT	03-29-2011	SWR
B	ADDED 4" SIZE BACK TO TABLE	10-18-2010	SWR
A	ELIMINATED SIZES 2"-4" FROM TABLE	05-13-2010	SWR
REV.	DESCRIPTION	DATE	BY

GA INDUSTRIES, LLC				
4"-24" SPRING ASSISTED RUBBER FLAPPER SWING CHECK VALVE W/COUNTERWEIGHTED POSITION INDICATOR AND LIMIT SWITCH (OPTIONAL) 125# ANSI FLANGES				
STANDARD TOLERANCES (UNLESS OTHERWISE NOTED) FINISHED SURFACES ONLY DIMENSIONS SHOWN IN INCHES .x = ±.02 .xx = ±.01 .xxx = ±.002 FRACTIONS ±1/64" ANGLES ±1° FINISH XX RMS	SERIAL NO.	SCALE	DRAWN BY SWR	
		NONE	APPR. BY JT	
	REFERENCES	EFFECTIVE DATE	05-27-2009	TO
	FIG. NUMBER	FILE	DRAWING NO.	REV.
	SB200-DPI	C	C-1392	E

O:\AUTOCAD\GA-VALVE\GA-SHOW\C-1392-E.DWG