

Figures 230-D, 230-U 2" – 14" Lever & Spring Swing Check Valve

Description

VAG/GA Industries Figures 230-D and 230-U are heavy duty, customizable swing check valves that utilize an adjustable spring assisted closure to minimize slam and hammer. The valves are typically installed on the discharge of a pump to prevent backflow when the pump is offline. It opens smoothly at pump start and closes quickly and quietly upon pump shutdown.

Figure 230-D and 230-U meet the design, materials of construction and testing required by AWWA C508 and is suitable for use with water or sewage, in horizontal or vertical flow up pipes.

Product Features

- Heavy duty construction withstands rigors of pump station operation
- Full flow area when swung only 25° away from seat for low head loss and reduced pumping cost
- Replaceable rubber disc seat for tight seating at low and high pressure
- Lever & spring field convertible right hand to left hand side, and from horizontal to vertical installation

Standard Materials

- Body & Disc Cast Iron, ASTM A126 Class B
- Cover Steel, ASTM A36
- Body Seat Stainless Steel, Type 316
- Disc Seat Buna-N
- Hinge Shaft Stainless Steel, Type 303
- External Fasteners Steel, A307, Zinc Plated
- Spring Steel

Corrosion Protection

- Standard: Uncoated Internal, Enamel Primer External (See Options P2 and P3 for upgraded corrosion protection packages)

Non-Shock Working Water Pressure at up to 150F (66C)			
Figure No.	230-D		230-U
Flange	ANSI B16.1 Class 125		ANSI B16.1 Class 250
Size	2" – 12"	14"	2" – 14"
Max Working Pressure	200 PSI	150 PSI	300 PSI
Shell Test	400 PSI	300 PSI	450 PSI



Approvals & Certifications

- NSF-61 Certified for Contact with Drinking Water
- NSF-372 Certified Lead Free (Max 0.25% Lead Content by Weighted Average)
- AIS and BABA Compliant (See Option US)


Options

- Option P2: Minimum 6 mil Internal and External 2-Part NSF-61 Carboline 891 Epoxy and 316 SS External Fasteners
- Option P3: Minimum 6 mil Internal and External 2-Part NSF-61 Carboline 891 Epoxy, 316 SS Hinge Shaft and External Fasteners
- Option 1D: With Honeywell HDLS NEMA 1, 3, 4, 4X, 6, 6P, 12 & 13 DPDT Limit Switch
- Option LH: With Lever & Spring Factory Installed on Left Side Facing Inlet
- Option S3: Type 316 Stainless Steel Hinge Shaft (Included in Option P3)
- Option US: AIS and BABA Compliant (Optional 4" & 6", Standard All Other Sizes)

Ordering Data

- Figure Number (230-D or 230-U)
- Size
- Options and/or Accessories


Data Sheet 230.01D

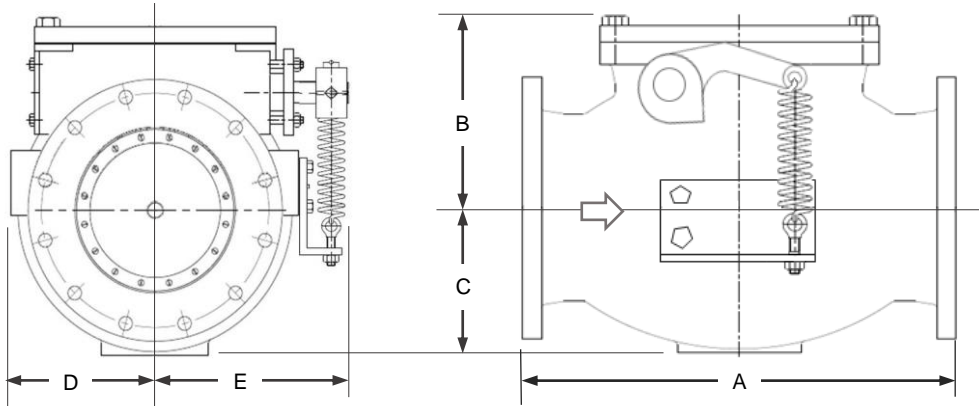

Installation Dimensions

SIZE	2", 2½", 3"	4"	6"	8"	10"	12"	14"
A	12	13	17½	18	23	28	33
B	7	8½	9	12	14	16	22
C	5	5	6	9	9	11	13
D	10	11	12	14	15	17	20
E	5	5	7	8	9	11	14
WGT	100	150	230	310	480	970	1480

VERTICAL INSTALLATION



- Face to face same for both Class 125 and Class 250 flanged valves, Class 250 supplied with flat face
- Dimensions in inches, weight in pounds and are approximate. Request certified drawings if critical.
- Larger sizes available, consult factory

