

Figures 240-D & 242-D Ball Check Valves

Description

GA Industries Figures 240-D and 242-D Ball Check Valves are non-clogging check valves that provide dependable, trouble free service in storm water, wastewater and sewage pumping applications. The valves have no external moving parts and are ideal for use with submersible pumps because they can be installed inside the wetwell, above or below the water surface.

Operation

At pump start, the ball freely moves up and away from its seat on smooth ribs integrally cast on the inside of the body. While in operation, flow through the valve tends to spin the ball shedding solids and stringy material. That action, combined with the lack of pockets or projections in the flow path, ensure long term, clog-free operation. At pump shutdown, the ball quickly falls to the seat to prevent return flow.



Standard Features

- Heavy-duty cast iron body with removable cover
- Buna-N rubber or rubber coated sinking ball
- Drop tight sealing
- Suitable for vertical flow up or horizontal installation

Standard Materials

- Body & Cover Cast Iron, ASTM A126 Class B
- Ball Aluminum Core, Molded & Vulcanized Buna-N Rubber Coating
- Cover Bolts Zinc Plated Steel
- Coating Internal and external NSF-61/600 certified 2-part epoxy

Options


- Option SE 316 Stainless Steel Cover Bolts

Non-Shock Working Water Pressure at up to 150F (66C)	
Figure No.	240-D, 242-D
Connection	ANSI B16.1 Class 125 Flange
Size	3" to 12"
Max Working Pressure	150 PSI
Hydro Test	225 PSI

Installation Dimensions

Fig. No	SIZE	A	B	C	D	Cv	WGT
240-D	3"	13½	7%	¾	8%	242	60
	4"	17½	9¼	4½	10%	454	100
	6"	24¼	12¼	5½	13%	1,040	230
	8"	31½	15%	6%	16%	2,000	370
	10"	39%	19¼	8	20%	3,100	630
242-D	4"	11½	7%	4½	8%	290	80
	6"	14	9¼	5½	10%	550	140

Dimensions in inches, weight in pounds and are approximate. Request certified drawings if critical.

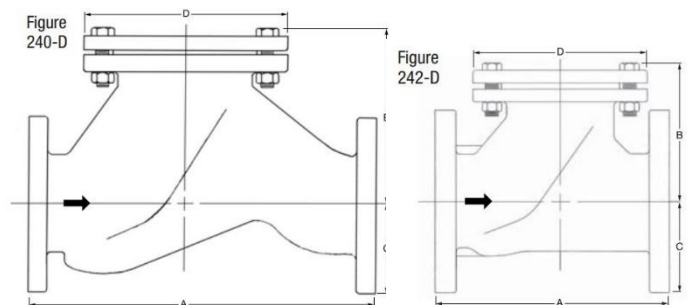

Ordering Data

- Figure Number (240-D or 242-D)
- Size
- Options